


SPECIFICATIONS

Drop Deck Container Trailer

- G.V.W.R. Rating: 80,000 lb.
- Trailer Main Frame: I-Beam Construction
- Trailer Main Frame Flanges: 5/8" x 5" A514 (T1)
- Trailer Web Section: 1/4" A514 (T1)
- Tilt Frame: Structural Tubing Construction with 1" flatbar upper and lower reinforcement 10" x 4" x 1/2"
- Suspension: Watson & Chalin (Air Ride Model: TA-300U Underslung) 9" Ride Height 30,000 lbs.
- Axles: Automatic Slack Adjusters Outboard Drum 5" round 71 1/2" track 25,000 lb. each
- Wheels: Steel 8.25 x 22.5
- Tires: 11R22.5 x 25 Radial 14 Ply
- Brakes: ABS (251M System)
- Rear Fenders: Stainless Steel
- Bumper: Air Operated, ICC Approved
- Lift Cylinder: (2) 7" Bore x 172" stroke 3 stage, Double Acting Telescopic
- Reeving Cylinders: (2) 7" Bore x 3" Rod x 120" Stroke
- Main Cable: 7/8" Dia.
- Landing Gear: Jost (Model: A400 T14) 14" Travel with sand shoes 50,000 lb. Capacity
- Operating Pressure: 2000 PSI max.
- Dump Angle: 50 deg.
- Hydraulic Valve: 2 Spool VA-20
- Side Rollers: 4 1/2" O.D. Greasable 8 per side

Options:

- Aluminum Wheels
- Tires 255 / 70R 22.5 (Low Profile)
- Tri-Axle
- Lift Kit for Rear Axle
- Custom Paint and Colors
- Additional Toolbox

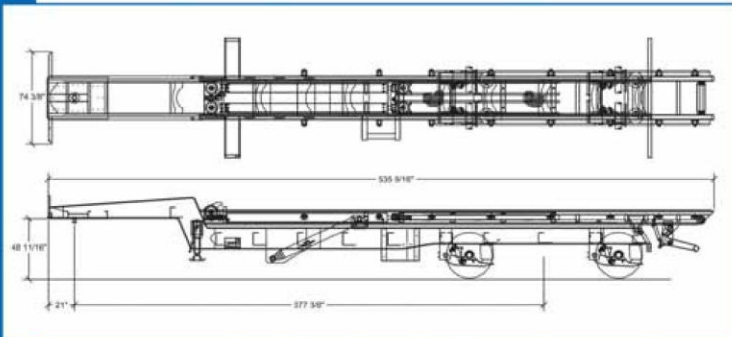

PREFERRED
Recycling Equipment Inc.

Preferred Recycling Equipment Inc.
2 Main Street East, Box # 436
Grimsby, Ontario
L3M 4H8

Phone: 1.866.679.8783

Email: info@preferredrecyclingequipment.com

Web: www.preferredrecyclingequipment.com